



Hyper-efficient cooling, stylised.

Presenting the Climate Wizard CW-P15.

Climate Wizard is the global leader in delivering hyper-efficient cooling technology that covers an exceptionally large range of flexible configurations in a wide range of industry applications.

The latest Climate Wizard model provides new installation advantages, to optimise rooftop footprint and provide more install options.

HYPER-EFFICIENT BENEFITS

- Vastly reduce cooling costs (retrofit or new install)
- Improve the IAQ (Indoor Air Quality) with 100% outside air
- No moisture added
- Cooling performance increases when air temperature rises
- Climate Wizard's cooling performance can rival that of refrigerated systems, using up to 80% less energy


NEW FEATURES

- UV-Proof Polymer shell & structure for withstanding extreme weather conditions: light, compact & stylish
- Integrated air filtration system with washable pleated panel filters or optional disposable type.
- Easy-lift crane lifting points
- Double fan allows more flexibility and better control
- Single phase electrical supply
- Can be installed side-by-side on either side, all maintainable components can be accessed front or back

OPTION TO INSTALL IN PRE-COOLING MODE

A super cost effective way of cooling outside air required by refrigerated systems


- Extend the life of existing refrigerated systems
- Improve the cooling performance of refrigerated equipment

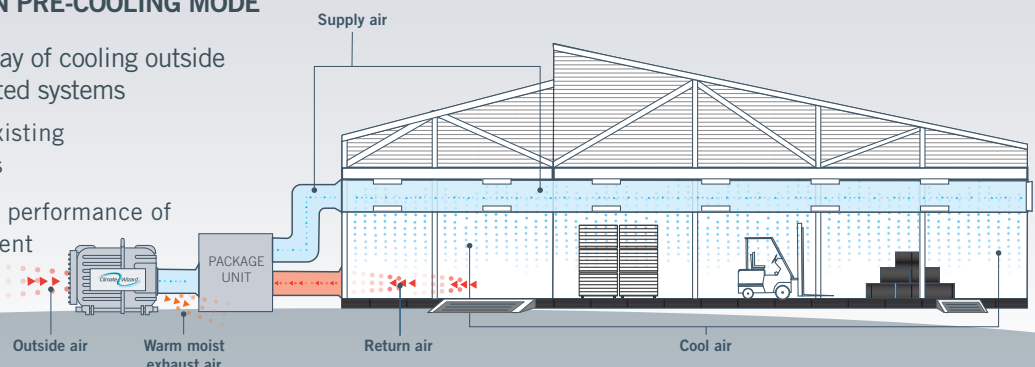

HOW IT WORKS

Climate Wizard indirect evaporative air conditioners use a hyper-efficient counter-flow heat exchanger to produce 100% fresh, cool, outside air, with no added moisture. The core is an air-to-air heat exchanger consisting of alternating dry and wet channels.

1. Hot outside air enters the cooler and the fan drives the fresh air through the dry channels.
2. On exiting, some of the air flows into the building and the remainder is forced back through the wet channels.
3. Air passing through the wet channels is cooled by water evaporation and cools the channel surface, before being exhausted as warm, moist air.
4. The temperature of the fresh air passing through the adjacent dry channels is reduced and this cooled air is then transferred into the building without any added moisture.

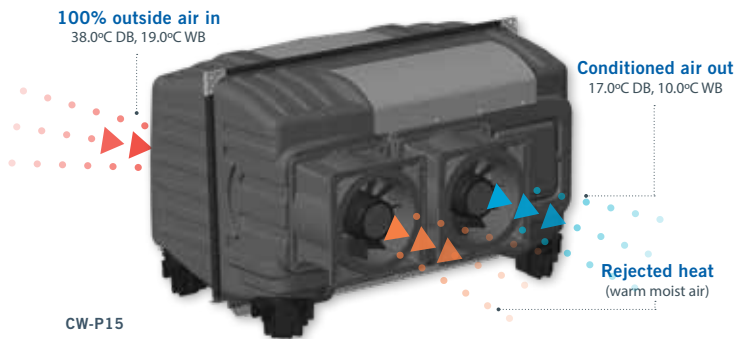


Psychrometric chart

Barometric pressure 101.3 kPa

The coloured lines on the psychrometric chart compare Climate Wizard's performance to that of a direct evaporative cooler on a hot day.

- Direct evaporative cooling
- Climate Wizard indirect evaporative air conditioning

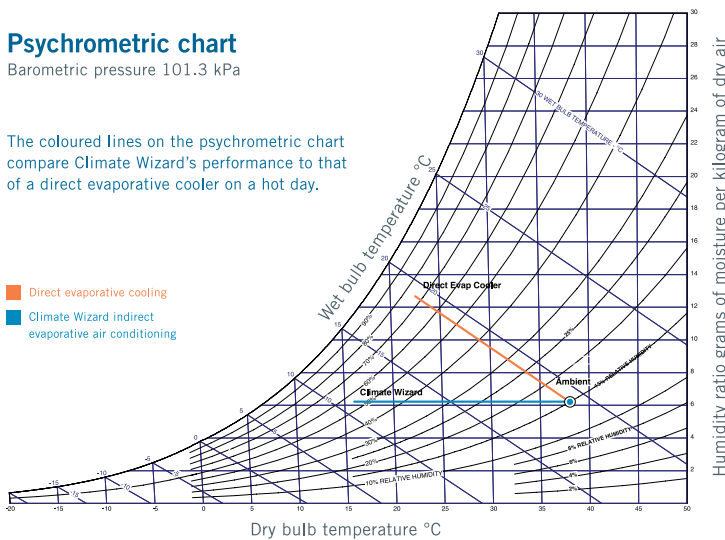

CW-P15 TECHNICAL SPECIFICATIONS

- Exceptional NATA (ISO 17025) certified cooling performance
- High efficiency inverter drive fan motors
- Proven water management system
- Thermostatic automatic or manual operation
- Sound reduction outlet ducting
- Easy installation
- BMS interface as standard with analogue and digital inputs
- Touch screen MagIQtouch Controller (Optional), wall controller or switch plate

Nominal cooling capacity*	23.7 kW
Rated airflow	1,100 l/s at 140 Pa
Max. external static pressure	250 Pa
Max. operating temperature	55° C
Power requirement	1.96 kW
Electrical supply	1-phase, 200-240 V, 50 Hz
Water supply	20 L/min delivered at 100 kPa, 800kPa max
Supply air configuration	Side discharge
Supply fan	1x sickle-bladed, airfoil profiled impellor with directly coupled inverter motor
Exhaust fan	1x sickle-bladed, airfoil profiled impellor with directly coupled inverter motor
Water circulation pump	1 x 240 V electric pump
Water management	Low voltage catalytic chlorinator and salinity probe
Drainage	1 x 240 V electric pump
Heat exchange core	3 x Climate Wizard patented counter-flow heat exchanger cores
Air filtration	6 x G4 pleated washable filters with metal frames or optional disposable type
Water reservoir	One piece, moulded polymer, 47 L
Shipping dimensions	2050 mm (L) x 1500 mm (W) x 1420 mm (H)
Dimensions	1960 mm (L) x 1440 mm (W) x 1285 mm (H)
Weight	239 kg (shipping) - 335 kg (operating)

Note: specifications subject to change. *Tested in accordance with ASHRAE 143 conditions of 38.0 °C db / 21.0 °C wb. Stand alone cooling capacity may be lower, depending on application.



eurosales@seeleyinternational.com
uksales@seeleyinternational.com

We provide full technical support to ensure optimal design for each application.



Seeley International France
 320 Avenue Berthelot
 69371 Lyon Cedex 08
 France
 Phone: +33 (0) 472 7847 80

Seeley International Italy
 Loc. Policiano 72/M
 52100 Arezzo Italy
 Phone: +39 (0) 575 97189

Seeley International UK
 Unit 11 Byron Business Centre,
 Duke Street
 Hucknall Nottingham
 NG15 7HP United Kingdom
 Phone: +44 (0) 115 9635630

